




www.fmindustrial.es

PROFESSIONAL HOSPITALITY - BAKERY

2020

Follow us:

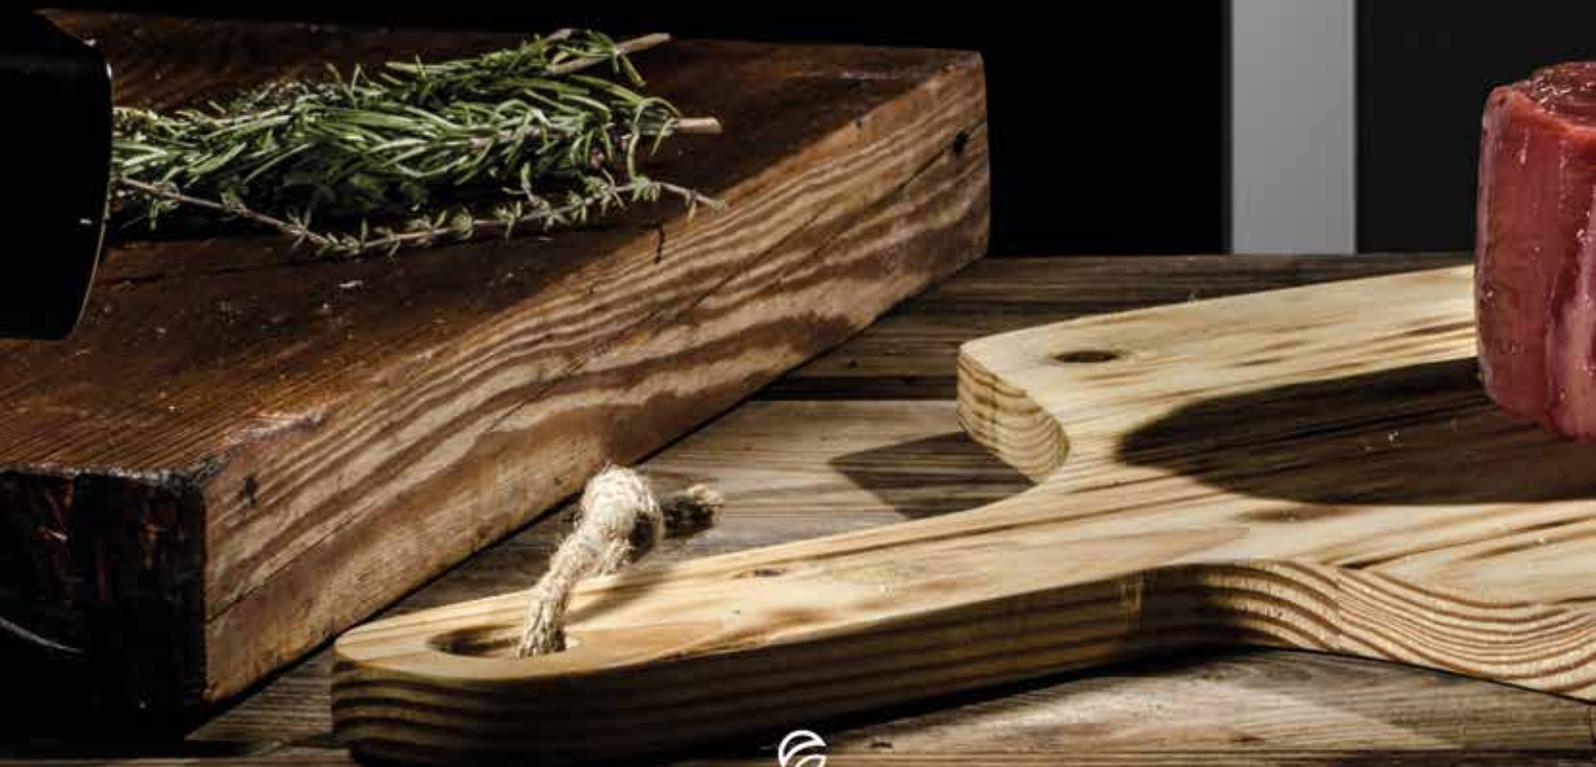



www.thermador.com

ST series
Gastro





ST COMPACT SERIES

Pages 18 - 29 **GASTRONOMY**



ST GASTRO SERIES

Pages 32 - 44 **GASTRONOMY**



ST BAKERY SERIES

Pages 46 - 60 **BAKERY**



RX SERIES

Pages 62 - 72 **BAKERY**



ST PASTRY SERIES

Pages 74 **PASTRY**



ST PIZZA SERIES

Pages 75 - 76 **PIZZERIA**




PROVERS

Pages 78-79



REGENERATORS

Pages 80-81

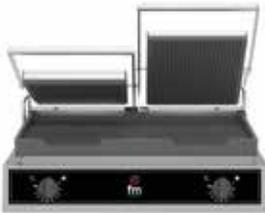

GRILLS

Page 82



TOASTERS

Page 83



TRAYS

Pages 84-87



TROLLEYS

Page 88



COMMON ACCESSORIES

Page 89



www.fmindustrial.es


ST series
Gastro





ST-M SERIES

- Manual control panel system.
- User friendly.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- ¾" Water connection.
- Easy to clean folding glass.
- 0 to 100 % humidity regulation.
- 0 - 120 minute timer and non-stop mode.
- Chimney manual control.
- Electric or gas (premix burner).
- Available with Gastronorm GN and 600x400 Pastry-Bakery trays.

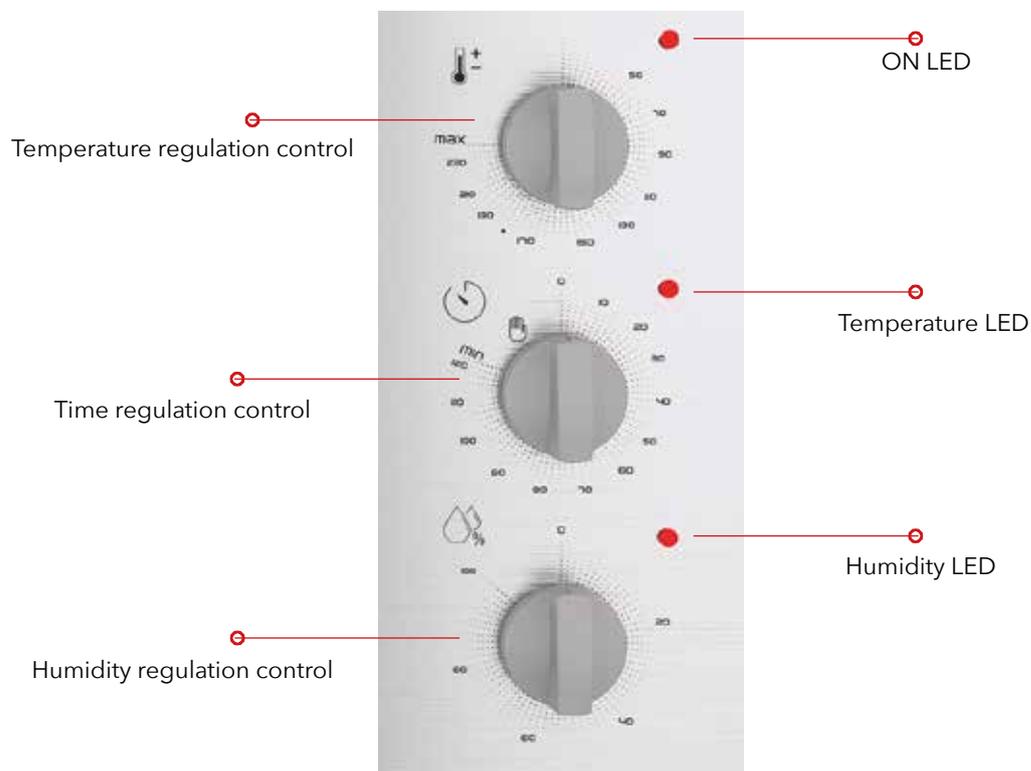




ST series
Compact


fm


fm

ST-E SERIES

- Digital display and encoder for regulation in control panel system.
- User friendly.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- ¾" Water connection.
- Chimney manual control.
- Two speed engine.
- Direct vaporization push button.
- Easy to clean folding glass.
- 0 to 100 % humidity regulation.
- 0 - 120 minute timer and non-stop mode.
- Available with Gastronorm GN trays.

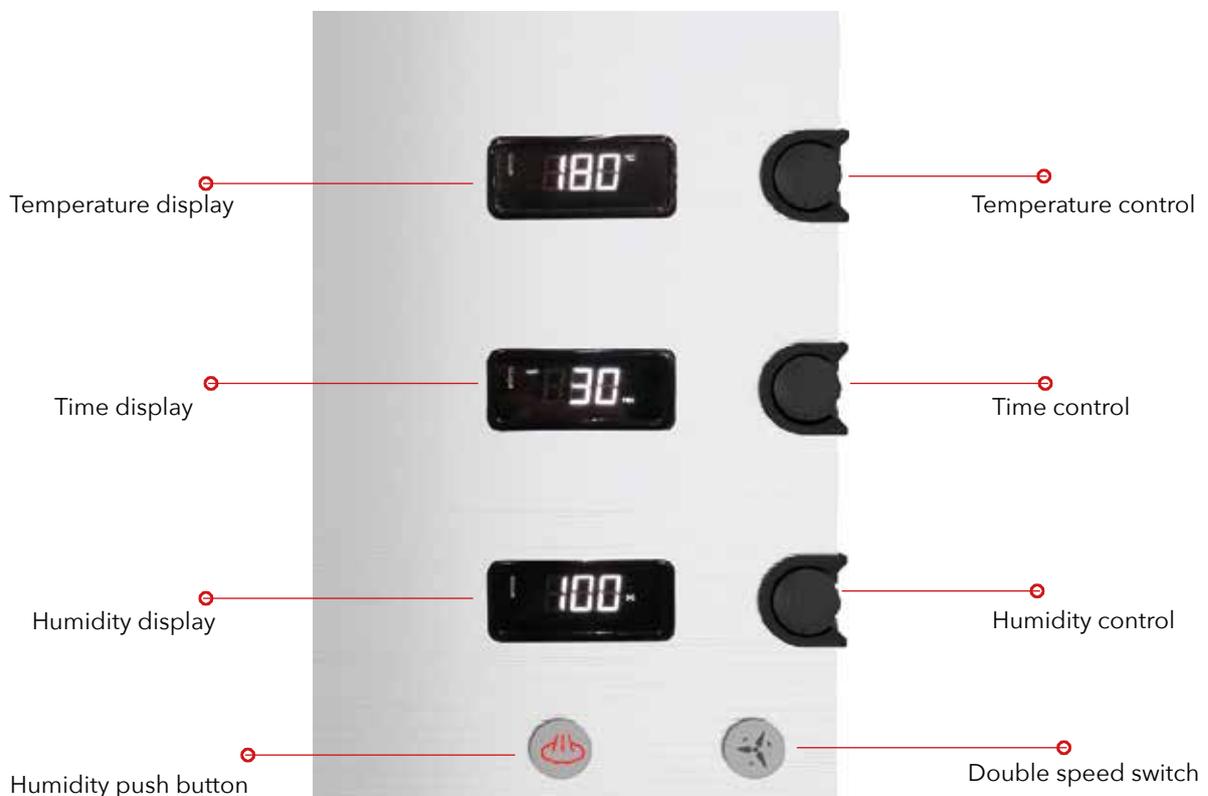



www.fmindustrial.es


ST series
Gastro


fm


fm

ST - V5 / V7 SERIES

- Digital display in control panel system.
- User friendly touch screen.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- ¾" Water connection.
- Easy to clean folding glass.
- Clima Control - % Humidity regulation
- % Step Speed control
- Steam Control - Programmable chimney
- 3 Cooking modes: dry heat, vapour and mixed.
- Core Probe, Vacuum Probe and Multipoint Probe.
- Cooking control using time, Core Probe or Delta T.
- 99 Cooking programs with 6 cooking stages each one.
- Multicook / All on Time.
- Regeneration / Maintain food temperature.
- User-configurable cooking book with pictures.
- Electric or gas (premix burner)
- Available with Gastronorm GN and 600x400 Pastry-Bakery trays.

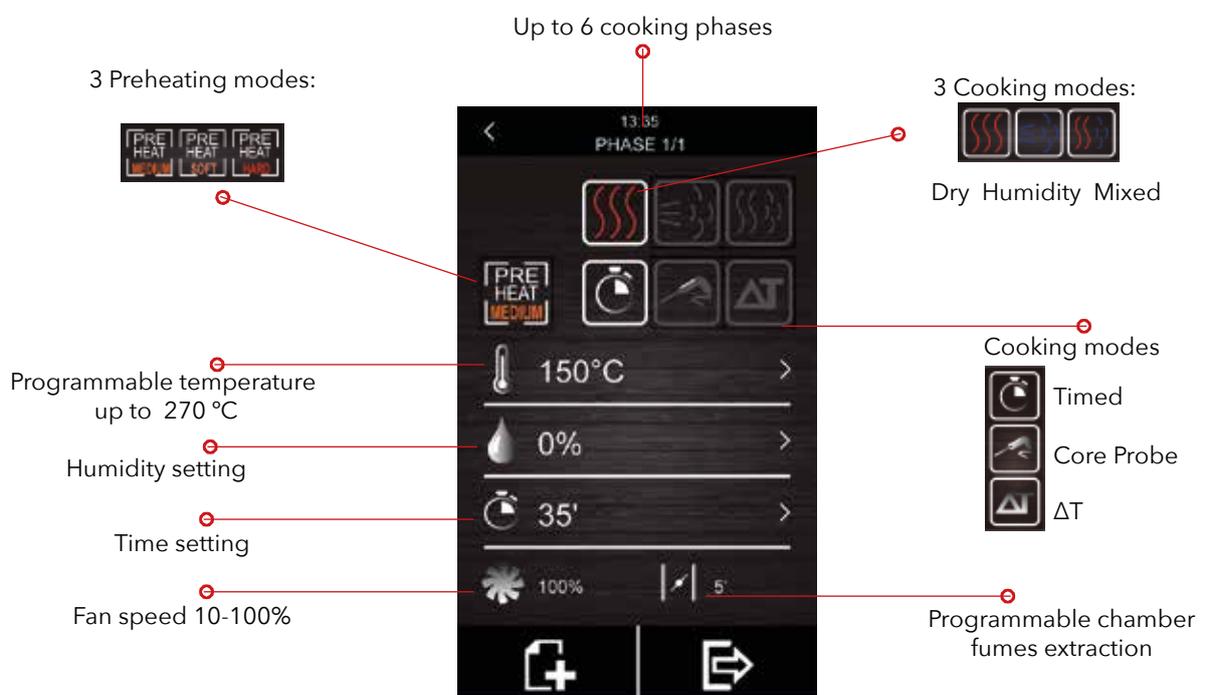

ST - V5 / V7 SERIES



Manual cooking mode



Recipe book



Multicook / All on time

Special cycles



AUTOMATIC WASHING



The 3 washing cycles that allows to adapt to the hygiene needs of the appliance after each day.




CONSUMPTION



Control consumption of every oven resources: electricity, water, detergent, rinse and water filters.

ST - V5 / V7 SERIES

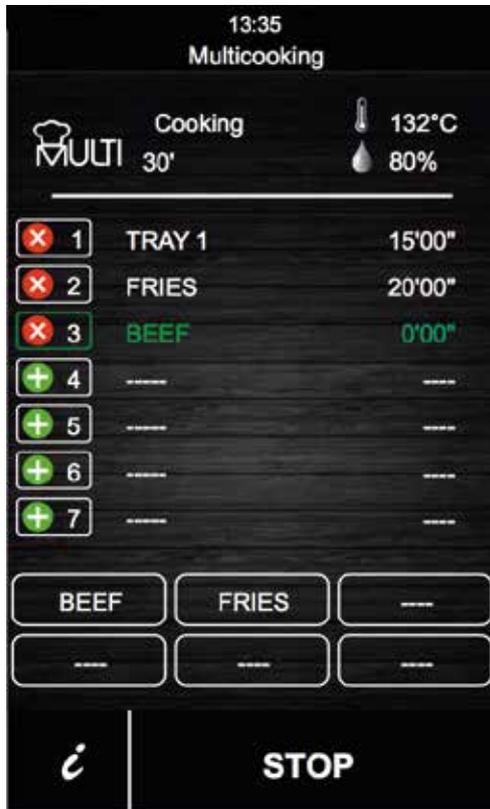

MULTICOOK

This system allows cooking different dishes with different cooking times, notifying the user when trays are ready.

ALL ON TIME

This system allows cooking different dishes with different cooking times, but finishing all of them at the same time. For this purpose, the oven notifies the user when each tray has to be introduced.

As a result, all of them will finish simultaneously.



FEATURES - EQUIPMENT



MANUAL COOKING

Set a cooking program for any dish easily, avoiding complicated processes to prepare your recipes.



CLIMA CONTROL

The ovens equipped with the "Clima Control" system adapt conditions in the cooking chamber to get superb results without the need of setting cooking modes previously. Forget complex cooking processes, just choose time, temperature, humidity and this system will do the rest.




FAN Control-Adjustable Speed

Thanks to the fan speed regulation feature (up to 10 speeds), any kind of recipe can be prepared, even the delicate ones. In addition, the rotation inverter provides uniform cooking results.



STEAM CONTROL

Steam control system allows a programmed flow of fumes out of the cooking chamber, managing to keep or reduce humidity inside it. As a result, homogeneously seared, perfect roasted or gratinated dishes are possible.



DELTA T

A constant temperature difference between the interior of the food and the cooking chamber makes possible a homogeneous cooking results in big sized pieces of food.



MULTIPOINT PROBE

Obtain the desired cooking thanks to the precise read and control of temperature in 3 different points of the product, no matter the size of it.



VACUUM PROBE

A special Core Probe, with a diameter of just 1.5 mm, allows controlling temperature inside the food without interfering the vacuum process.





COOKING PHASES

Setting cooking stage by stage makes possible to configure temperature and humidity in the same cooking cycle. This feature makes possible to cook the food and sear or gratin at the end of the process.



RECIPE BOOK

All ovens with Smart System V7 includes a cooking book with images and recipes already set. This recipe book can be edited and personalised for each customer.



HACCP

HACCP

Available needed data log to meet HACCP requirements.



PREMIX GAS BURNERS

This new combustion control system, equipped in all our gas ovens, allows an increase in efficiency, decreases fuel consumption, a more homogeneous heat distribution and, at the same time, simplifies maintenance interventions.



REGENERATION / MAINTAIN FOOD TEMPERATURE

With this feature is possible to keep food quality, increasing temperature of refrigerated, frozen or packed food.



FERMENTATION

This process obtains optimum conditions to guarantee an optimum fermentation. The result is the desired textures and finishing.



PLANNING

Program automatic turn on, make the most of each day. It will not be necessary to stay at work to start with the daily routine.



ST BAKERY SERIES



- Digital display in control panel system.
- User friendly touch screen.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- ¾" Water connection.
- Easy to clean folding glass.
- Clima Control-Time humidity regulation
- % Step Speed control
- Steam Control - Programmable chimney
- 3 Cooking modes: dry heat, vapour and mixed.
- Core Probe, Vacuum Probe and Multipoint Probe.
- Cooking control using time, Core Probe or Delta T.
- 99 Cooking programs with 6 cooking stages each one.
- Multicook / All on Time.
- Regeneration / Maintain food temperature.
- User-configurable cooking book with pictures.
- Electric or gas (premix burner)
- Available with Gastronorm GN and 600x400 Pastry-Bakery trays.

ST PASTRY SERIES



- 5" Touch Screen.
- Independent up and floor temperature regulation.
- Maximum temperature 350°C.
- Energy saving mode.
- Up to 6 cooking stages.
- Recipe book.
- Steam Control - Programmable chimney.
- Programable automatic turn on.
- Humidity system, allows manual and programable injection cycles.



180°

30.

100.

ST series
Compact

www.fincos.com



ST *Compact*



ST series

fm




ST COMPACT SERIES

4 x GN 2/3

STC 423 E

Reference	710457
Internal dimensions	(W)385 x (D)385 X (H)302 mm.
External dimensions	(W)530 x (D)620 X (H)580 mm.
 Electric power	3.700 W
 Maximum temperature	250°
 Weight	50 Kg
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
8 Trays capacity	GN 2/3 20 mm depth
4 Trays capacity	GN 2/3 40 mm depth
3 Trays capacity	GN 2/3 65 mm depth


Longitudinal tray position



STC 423 V5

Reference	710458
Internal dimensions	(W)385 x (D)385 X (H)302 mm.
External dimensions	(W)530 x (D)620 X (H)580 mm.
 Electric power	3.700 W
 Maximum temperature	270°
 Weight	50 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Automatic washing	standard
Removable core probe	standard
Change door opening	
8 Trays capacity	GN 2/3 20 mm depth
4 Trays capacity	GN 2/3 40 mm depth
3 Trays capacity	GN 2/3 65 mm depth

Longitudinal tray position




ST COMPACT SERIES

4 x GN 1/1

STC 411 E

Reference	710459
Internal dimensions	(W)385 x (D)560 X (H)302 mm.
External dimensions	(W)530 x (D)795 X (H)580 mm.
 Electric power	5.700 W
 Maximum temperature	250°
 Weight	59 Kg
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 411 EW

Reference	710460
Internal dimensions	(W)560 x (D)385 X (H)302 mm.
External dimensions	(W)720 x (D)620 X (H)580 mm.
 Electric power	5.700 W
 Maximum temperature	250°
 Weight	64 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




ST COMPACT SERIES

4 x GN 1/1

STC 411 V5

Reference	710641
Internal dimensions	(W)385 x (D)560 X (H)302 mm.
External dimensions	(W)530 x (D)795 X (H)580 mm.
 Electric power	5.700 W
 Maximum temperature	270°
 Weight	57 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 411 V5 W

Reference	710462
Internal dimensions	(W)560 x (D)385 X (H)302 mm.
External dimensions	(W)720 x (D)620 X (H)580 mm.
 Electric power	5.700 W
 Maximum temperature	270°
 Weight	64 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




ST COMPACT SERIES

6 x GN 1/1

STC 611 E

Reference	710463
Internal dimensions	(W)385 x (D)560 X (H)385 mm.
External dimensions	(W)530 x (D)795 X (H)665 mm.
 Electric power	7.200 W
 Maximum temperature	250°
 Weight	65 Kg
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 611 EW

Reference	710464
Internal dimensions	(W)560 x (D)385 X (H)385 mm.
External dimensions	(W)720 x (D)620 X (H)665 mm.
 Electric power	7.200 W
 Maximum temperature	250°
 Weight	68 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




ST COMPACT SERIES

6 x GN 1/1

STC 611 V5

Reference	710465
Internal dimensions	(W)385 x (D)560 X (H)385 mm.
External dimensions	(W)530 x (D)795 X (H)665 mm.
 Electric power	7.200 W
 Maximum temperature	270°
 Weight	65 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 611 V5 W

Reference	710466
Internal dimensions	(W)560 x (D)385 X (H)385 mm.
External dimensions	(W)720 x (D)620 X (H)665 mm.
 Electric power	7.200 W
 Maximum temperature	270°
 Weight	68 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




ST COMPACT SERIES

10 x GN 1/1

STC 1011 E

Reference	710467
Internal dimensions	(W)385 x (D)560 X (H)605 mm.
External dimensions	(W)530 x (D)795 X (H)885 mm.
 Electric power	11.400 W
 Maximum temperature	250°
 Weight	92 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 1011 EW

Reference	710468
Internal dimensions	(W)560 x (D)385 X (H)605 mm.
External dimensions	(W)720 x (D)620 X (H)885 mm.
 Electric power	11.400 W
 Maximum temperature	250°
 Weight	95 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




ST COMPACT SERIES

10 x GN 1/1

STC 1011 V5

Reference	710469
Internal dimensions	(An)385 x (F)560 X (Al)605 mm.
External dimensions	(An)530 x (F)795 X (Al)885 mm.
 Electric power	11.400 W
 Maximum temperature	270°
 Weight	92 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Trifásico 3F + N + T
Automatic washing	de serie
Removable core probe	de serie
Change door opening	
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth


Longitudinal tray position



STC 1011 V5 W

Reference	710470
Internal dimensions	(W)560 x (D)385 X (H)605 mm.
External dimensions	(W)720 x (D)620 X (H)885 mm.
 Electric power	11.400 W
 Maximum temperature	270°
 Weight	95 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth

Transverse tray position



ST COMPACT SERIES


STANDS		DIMENSIONS	COMPATIBLE MODELS		RRP PRICE
	ST-C 200 Ref. 710471	(W)490 x (D)670 x (H)200 mm.	STC 1011 V5 STC 611 V5 STC 411V5	STC 1011 E STC 611 E STC 411 E	
	ST-C 400 Ref. 710472	(W)490 x (D)670 x (H)400 mm.	STC 1011 V5 STC 611 V5 STC 411V5	STC 1011 E STC 611 E STC 411 E	
	ST-C 650 Ref. 710473 N. guides - 7	(W)490 x (D)670 x (H)650 mm.	STC 1011 V5 STC 611 V5 STC 411V5	STC 1011 E STC 611 E STC 411 E	
	ST-C 850 Ref. 710474 N. guides - 10	(W)490 x (D)670 x (H)850 mm.	STC 1011 V5 STC 611 V5 STC 411V5	STC 1011 E STC 611 E STC 411 E	
	ST-C 650 B Ref. 710475 N. guides - 7	(W)490 x (D)495 x (H)650 mm.	STC 423 V5 ST 423 E		
	ST-C 850 B Ref. 710476 N. guides - 10	(W)490 x (D)495 x (H)850 mm.	STC 423 V5 ST 423 E		
	STC 200 W Ref. 710477	(W)700 x (D)495 x (H)200 mm.	STC 1011 V5 W STC 611 V5 W STC 411V5 W	STC 1011 EW STC 611 EW STC 411 EW	
	STC 400 W Ref. 710478	(W)700 x (D)495 x (H)400 mm.	STC 1011 V5 W STC 611 V5 W STC 411V5 W	STC 1011 EW STC 611 EW STC 411 EW	
	STC 650 W Ref. 710479 N. guides - 8	(W)700 x (D)495 x (H)650 mm.	STC 1011 V5 W STC 611 V5 W STC 411V5 W	STC 1011 EW STC 611 EW STC 411 EW	
	STC 850 W Ref. 710480 N. guides - 8	(W)700 x (D)495 x (H)850 mm.	STC 1011 V5 W STC 611 V5 W STC 411V5 W	STC 1011 EW STC 611 EW STC 411 EW	
	Ref. 710286	Wheeled option			

ACCESSORIES



HOODS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>Includes: - Extraction motor - Fumes condenser</p>	COMPACT STC-1/1 Ref. 710481 (W)630 x (D)950 x (H)235 mm.	STC 411V5 STC 611V5 STC 1011 V5	STC 411E STC 611E STC 1011 E
	COMPACT STC-2/3 Ref. 710482 (W)630 x (D)775 x (H)235 mm.	STC 423 V5 STC 423 E	
	COMPACT STC-W 1/1 Ref. 710483 (W)720 x (D)620 x (H)235 mm.	STC 411 V5 W STC 611 V5 W STC 1011 V5 W	STC 411 E W STC 611 E W STC 1011 E W
Fumes outlet connection ø 120 mm.			

FUMES CONDENSER KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STC COMPACT Ref. 710487 (W)530 x (D)475 x (H)235 mm.	STC 411V5 STC 611V5 STC 1011 V5	STC 411E STC 611E STC 1011 E
	STC-W COMPACT Ref. 710488 (W)720 x (D)330 x (H)235 mm.	STC 411 V5 W STC 611 V5 W STC 1011 V5 W	STC 411 E W STC 611 E W STC 1011 E W


FIRST INSTALLATION KIT	CONTAINS	RRP PRICE
 <p>Ref. 710434</p>	<p>The first installation kit contains: Pipes, connections, adapters and the required accessories for the oven installation. 1 Kg of FM detergent and rinse</p>	

SUPERPOSITION KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	COMPACT STC-1/1 Ref. 710484 (W)530 x (D)795 x (H)80 mm.	STC 411V5 STC 611V5 STC 1011 V5	STC 411E STC 611E STC 1011 E
	COMPACT STC-W 1/1 Ref. 710486 (W)720 x (D)620 x (H)80 mm.	STC 411 V5 W STC 611 V5 W STC 1011 V5 W	STC 411 E W STC 611 E W STC 1011 E W
	COMPACT STC-2/3 Ref. 710485 (W)530 x (D)620 x (H)80 mm.	STC 423 V5 STC 423 E	


ST COMPACT COMPOSITIONS

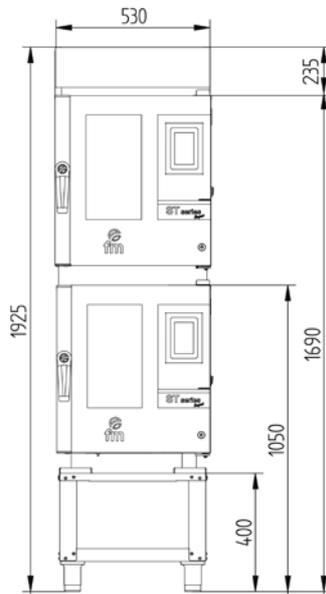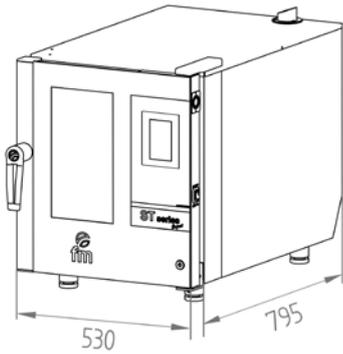


COMPACT STC-1/1 HOOD
ST-C611 V5
ST-C611 V5
ST-C400 STAND
STC-1/1 SUPERPOSITION KIT

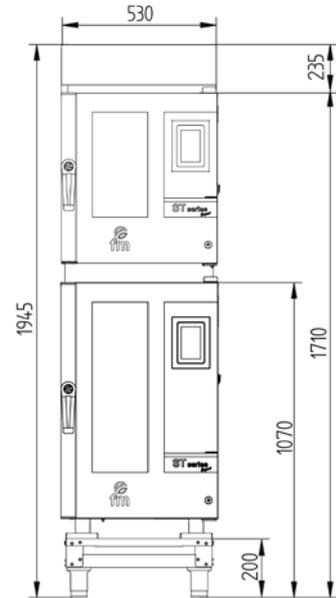


COMPACT STC-1/1 HOOD
ST-C611 V5
ST-C1011 V5
ST-C200 STAND
STC-1/1 SUPERPOSITION KIT

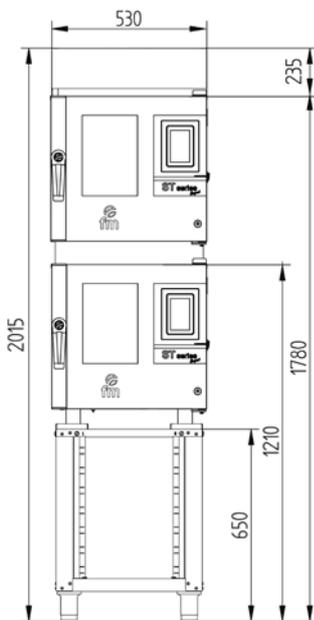

COMPACT STC-1/1 HOOD
ST-C411 V5
ST-C411 V5
ST-C650 STAND
STC-1/1 SUPERPOSITION KIT

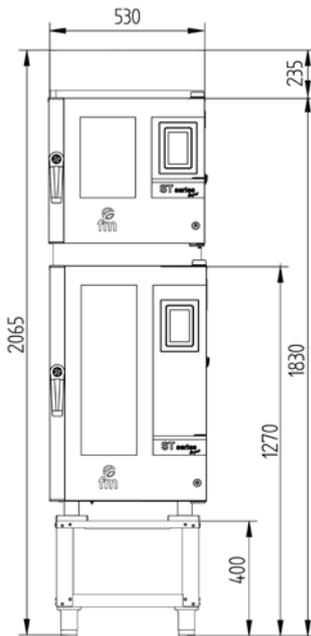


COMPACT STC-1/1 HOOD
ST-C411 V5
ST-C1011 V5
ST-C400 STAND
STC-1/1 SUPERPOSITION KIT

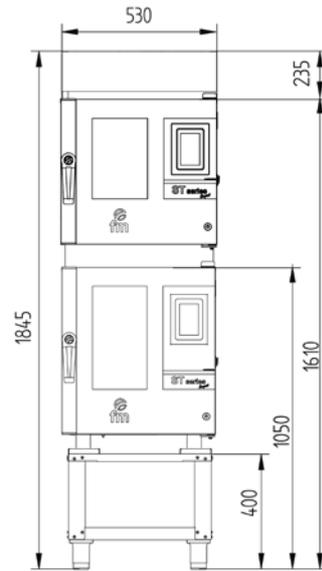


COMPACT STC-1/1 HOOD
ST-C411 V5
ST-C611 V5
ST-C400 STAND
STC-1/1 SUPERPOSITION KIT



ST COMPACT W COMPOSITIONS

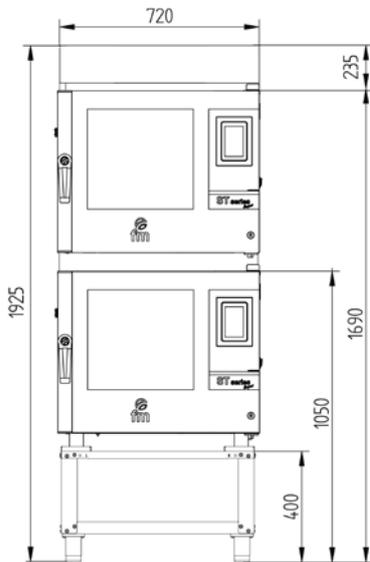


COMPACT STC-W HOOD
ST-C611 V5 W
ST-C611 V5 W
STC-400 W STAND
STC-W SUPERPOSITION KIT

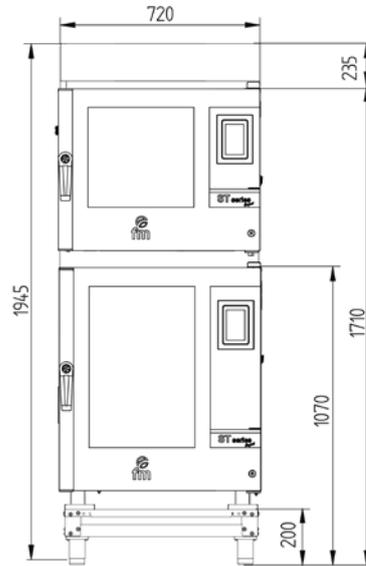


COMPACT STC-W HOOD
ST-C611 V5 W
ST-L1011 V5 W
STC-200 W STAND
STC-W SUPERPOSITION KIT

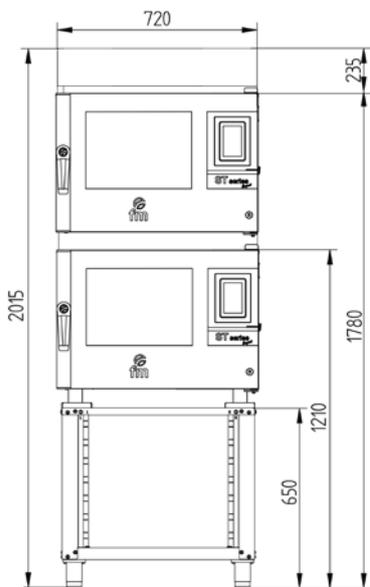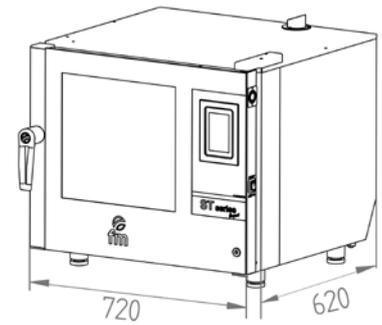

COMPACT STC-W HOOD
ST-C411 V5 W
ST-C411 V5 W
STC-650 W STAND
STC-W SUPERPOSITION KIT

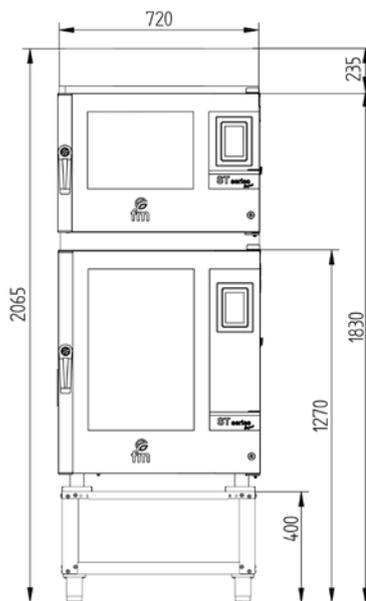

COMPACT STC-W HOOD
ST-C411 V5 W
ST-C1011 V5 W
STC-400 W STAND
STC-W SUPERPOSITION KIT

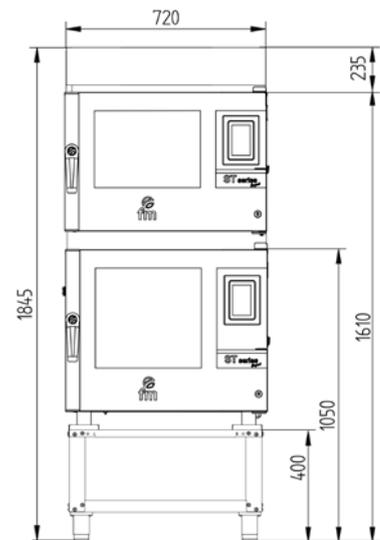

COMPACT STC-W HOOD
ST-C411 V5 W
ST-C611 V5 W
STC-400 W STAND
STC-W SUPERPOSITION KIT




fm



www.fmindustrial.es

ST series
Gastro



ST *Gastro*

ST GASTRO 71 SERIES

7 x GN 1/1

STG 71 M

Reference	710557
Internal dimensions	(W)620 x (D)405 X (H)545 mm.
External dimensions	(W)790 x (D)790 X (H)825 mm.
 Electric power	10.200 W
 Maximum temperature	250°
 Weight	78 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
7 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position



STG 71 V7

Reference	710558
Internal dimensions	(W)620 x (D)405 X (H)545 mm.
External dimensions	(W)790 x (D)790 X (H)825 mm.
 Electric power	10.200 W
 Maximum temperature	270°
 Weight	78 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
7 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position



ST GASTRO 71 SERIES


7 x GN 1/1

STG 71 M GAS

Reference	710559
Internal dimensions	(W)620 x (D)405 X (H)545 mm.
External dimensions	(W)790 x (D)900 X (H)825 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	125 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	14 kW - 12040 kcal/h
7 Trays capacity	GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Transverse tray position




STG 71 V7 GAS

Reference	710560
Internal dimensions	(W)620 x (D)405 X (H)545 mm.
External dimensions	(W)790 x (D)900 X (H)825 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	125 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	14 kW - 12040 kcal/h
Automatic washing	standard
Removable core probe	standard
Change door opening	
7 Trays capacity	GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Transverse tray position




ST GASTRO 111 SERIES

11 x GN 1/1

STG 111 M

Reference	710561
Internal dimensions	(W)620 x (D)405 X (H)810 mm.
External dimensions	(W)790 x (D)790 X (H)1090 mm.
 Electric power	18.500 W
 Maximum temperature	250°
 Weight	106 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position



STG 111 V7

Reference	710562
Internal dimensions	(W)620 x (D)405 X (H)810 mm.
External dimensions	(W)790 x (D)790 X (H)1090 mm.
 Electric power	18.500 W
 Maximum temperature	270°
 Weight	106 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position



ST GASTRO 111 SERIES


11 x GN 1/1

STG 111 M GAS

Reference	710563
Internal dimensions	(W)620 x (D)405 X (H)810 mm.
External dimensions	(W)790 x (D)900 X (H)1090 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	140 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
11 Trays capacity	GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Transverse tray position




STG 111 V7 GAS

Reference	710564
Internal dimensions	(W)620 x (D)405 X (H)810 mm.
External dimensions	(W)790 x (D)900 X (H)1090 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	140 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Transverse tray position




ST GASTRO 201 SERIES

20 x GN 1/1

STG 201 ET

Reference	710565
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)930 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	250°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Trolley	standard
20 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position



STG 201 V7 T

Reference	710566
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)930 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	270°
 Weight	250 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Trolley	standard
Change door opening	
20 Trays capacity	GN 1/1
Distance between trays	65 mm.

Transverse tray position




ST GASTRO 201 SERIES

20 x GN 1/1

STG 201 V7 T GAS

Reference	710567
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)1030 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	288 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	38 kW - 32675 kcal/h
Automatic washing	standard
Removable core probe	standard
Trolley	standard
Change door opening	
20 Trays capacity	GN 1/1
Distance between trays	65 mm.
 Premix gas burners	

Transverse tray position



ST GASTRO 72 SERIES


7 x GN 2/1

STG 72 V7

Reference	710568
Internal dimensions	(W)620 x (D)730 X (H)545 mm.
External dimensions	(W)790 x (D)1180 X (H)825 mm.
 Electric power	14.200 W
 Maximum temperature	270°
 Weight	120 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
7 Trays capacity	GN 2/1 / (14) GN 1/1
Distance between trays	65 mm.



Longitudinal tray position




STG 72 V7 GAS

Reference	710569
Internal dimensions	(W)620 x (D)730 X (H)545 mm.
External dimensions	(W)790 x (D)1250 X (H)825 mm.
 Electric power	200 W
 Maximum temperature	270°
 Weight	145 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
Automatic washing	standard
Removable core probe	standard
Cambio apertura de puerta	
7 Trays capacity	GN 2/1 / (14) GN 1/1
Distance between trays	65 mm.



 Premix gas burners

Longitudinal tray position




ST GASTRO 112 SERIES

11 x GN 2/1

STG 112 V7

Reference	710570
Internal dimensions	(W)620 x (D)730 X (H)810 mm.
External dimensions	(W)790 x (D)1180 X (H)1090 mm.
 Electric power	28.500 W
 Maximum temperature	270°
 Weight	160 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 2/1 / (22) GN 1/1
Distance between trays	65 mm.

Longitudinal tray position




STG 112 V7 GAS

Reference	710571
Internal dimensions	(W)620 x (D)730 X (H)810 mm.
External dimensions	(W)790 x (D)1250 X (H)1090 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	175 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	28 kW - 24080 kcal/h
Automatic washing	standard
Removable core probe	standard
Change door opening	
11 Trays capacity	GN 2/1 / (22) GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Longitudinal tray position




ST GASTRO 202 SERIES

20 x GN 2/1

STG 202 V7 T

Reference	710572
Internal dimensions	(W)700 x (D)815 X (H)1480 mm.
External dimensions	(W)880 x (D)1200 X (H)1865 mm.
 Electric power	46.250 W
 Maximum temperature	270°
 Weight	290 kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Removable core probe	standard
Trolley	standard
Change door opening	
20 Trays capacity	GN 2/1 / (40) GN 1/1
Distance between trays	65 mm.

Longitudinal tray position




STG 202 V7 T GAS

Reference	710573
Internal dimensions	(W)700 x (D)815 X (H)1480 mm.
External dimensions	(W)880 x (D)1360 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	310 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	50 kW- 43000 kcal/h
Automatic washing	standard
Removable core probe	standard
Trolley	standard
Change door opening	
20 Trays capacity	GN 2/1 / (40) GN 1/1
Distance between trays	65 mm.

 Premix gas burners

Longitudinal tray position



ACCESSORIES

STANDS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STG 300 <i>Ref. 710574</i>	(W)715 x (D)600 x (H)300 mm.	STG 71 M STG 71 V7 STG 71 M GAS STG 71 V7 GAS STG 111 M STG 111 V7 STG 111 M GAS STG 111 V7 GAS
	STG 650 <i>Ref. 710575</i>	(W)715 x (D)600 x (H)650 mm.	N. Guides - 6 STG 71 M STG 71 V7 STG 71 M GAS STG 71 V7 GAS STG 111 M STG 111 V7 STG 111 M GAS STG 111 V7 GAS
	STG 850 <i>Ref. 710576</i>	(W)715 x (D)600 x (H)850 mm.	N. Guides - 8 STG 71 M STG 71 V7 STG 71 M GAS STG 71 V7 GAS STG 111 M STG 111 V7 STG 111 M GAS STG 111 V7 GAS
	STG 300 2/1 <i>Ref. 710577</i>	(W)715 x (D)925 x (H)300 mm.	STG 72 V7 STG 72 V7 GAS STG 112 V7 STG 112 V7 GAS
	STG 650 2/1 <i>Ref. 710578</i>	(W)715 x (D)925 x (H)650 mm.	N. Guides - 6 STG 72 V7 STG 72 V7 GAS STG 112 V7 STG 112 V7 GAS
	STG 850 2/1 <i>Ref. 710579</i>	(W)715 x (D)925 x (H)850 mm.	N. Guides - 8 STG 72 V7 STG 72 V7 GAS STG 112 V7 STG 112 V7 GAS
	<i>Ref. 710286</i>	Wheeled option	

ACCESSORIES

HOODS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>Includes: - Extraction motor - Fumes condenser</p>	STG Ref. 710581	(W)790 x (D)1010 x (H)300 mm.	STG 71 M STG 111 M STG 71 V7 STG 111 V7
	STG 201 Ref. 710582	(W)790 x (D)1010 x (H)300 mm.	STG 201 ET STG 201 V7 T
	STG 2/1 Ref. 710583	(W)790 x (D)1440 x (H)300 mm.	STG 72 V7 STG 1121 V7
	STG 202 Ref. 710627	(W)790 x (D)1440 x (H)300 mm.	STG 202 V7 T


Fumes outlet connection ø 120 mm.

FUMES CONDENSER KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STG Ref. 710584	(W)417 x (D)207 x(H) 300 mm.	STG 71 M STG 71 V7 STG 111 M STG 111 V7
	STG 2/1 Ref. 710585	(W)417 x (D)207 x(H) 300 mm.	STG 72 V7 STG 112 V7


FIRST INSTALLATION KIT	CONTAINS	RRP PRICE
	Ref. 710434 The first installation kit contains: Pipes, connections, adapters and the required accessories for the oven installation. 1 Kg of FM detergent and rinse	

SUPERPOSITION KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STG Ref. 710586	(W)788 x (D)758 x (H)78 mm.	STG 71 M STG 71 V7 STG 111 M STG 111 V7 STG 721 V7


ST GASTRO COMPOSITIONS

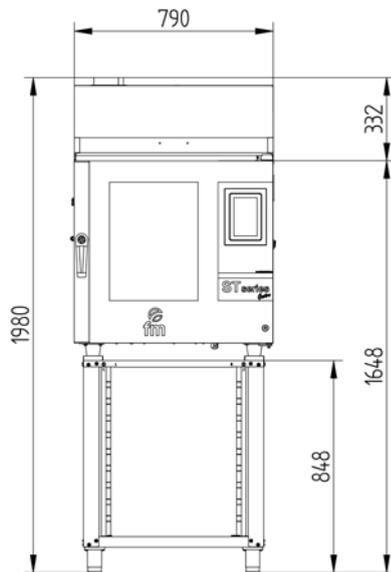


STG HOOD
STG 71 V7
STG-850 STAND

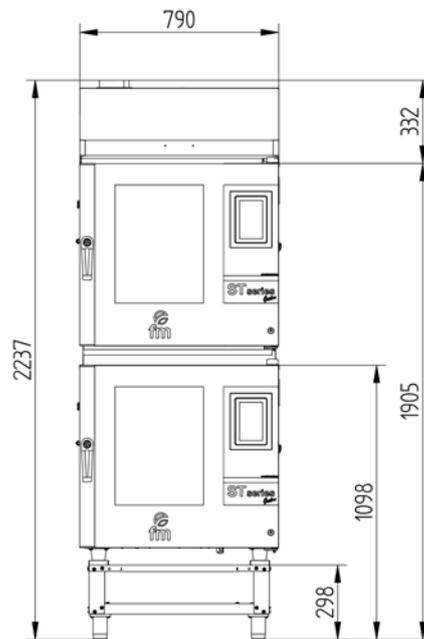


STG HOOD
STG 71 V7
STG 71 V7
STG-300 STAND
STG 71 SUPERPOSITION KIT

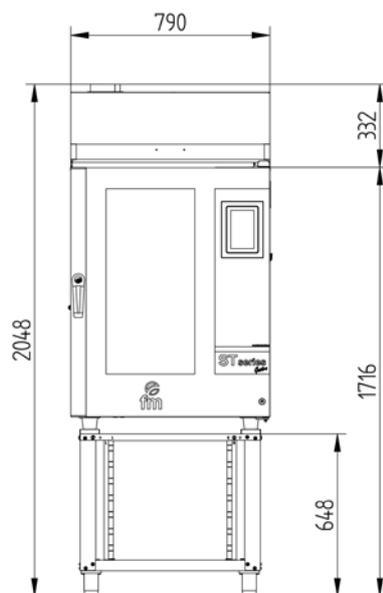

STG HOOD
STG 111 V7
STG-650 STAND

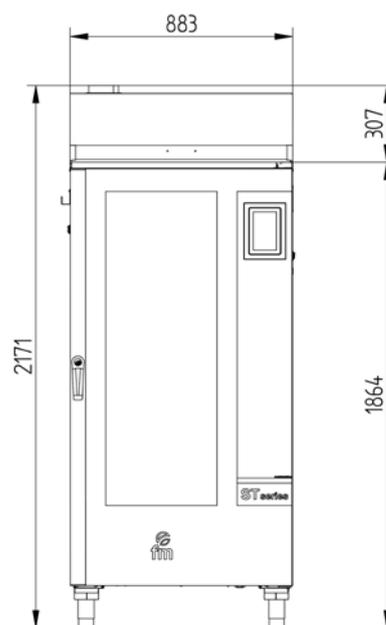

STG HOOD
STG 201 V7

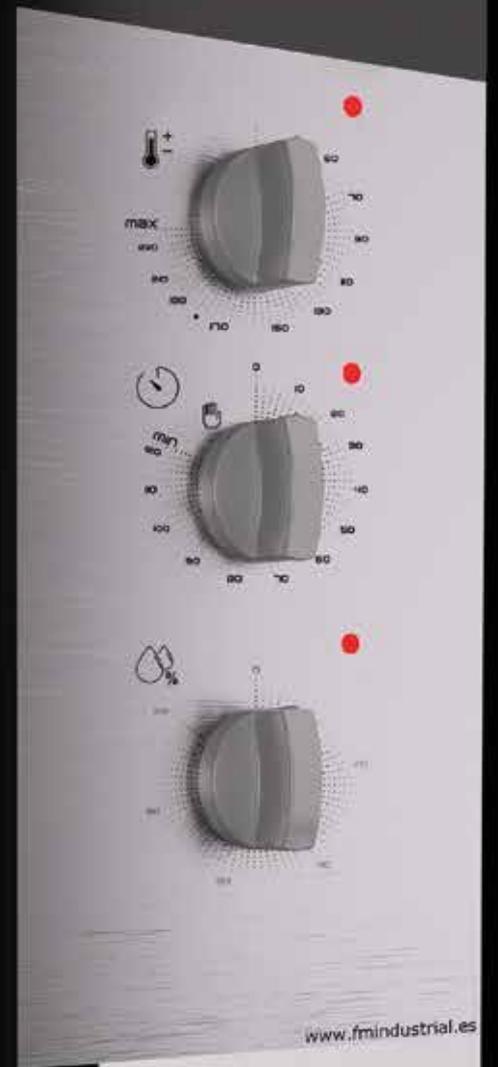

ST series

Bakery



ST *Bakery*



ST BAKERY 604 SERIES

4x600x400

STB 604 M

Reference	710489
Internal dimensions	(W)710 x (D)500 X (H)390 mm.
External dimensions	(W)880 x (D)905 X (H)670 mm.
 Electric power	7.500 W
 Maximum temperature	250°
 Weight	90 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
4 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

Transverse tray position



STB 604 V7

Reference	710490
Internal dimensions	(W)710 x (D)500 X (H)390 mm.
External dimensions	(W)880 x (D)905 X (H)670 mm.
 Electric power	7.500 W
 Maximum temperature	270°
 Weight	92 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
4 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.

Transverse tray position




ST BAKERY 606 SERIES

6x600x400

STB 606 M

Reference	710491
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)905 X (H)835 mm.
 Electric power	10.500 W
 Maximum temperature	250°
 Weight	108 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


Transverse tray position



STB 606 V7

Reference	710492
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)945 X (H)835 mm.
 Electric power	10.650 W
 Maximum temperature	270°
 Weight	110 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.

Transverse tray position




ST BAKERY 606 SERIES

6x600x400


STB 606 M GAS

Reference	710493
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)985 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	130 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	14 kW - 12040 kcal/h
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners

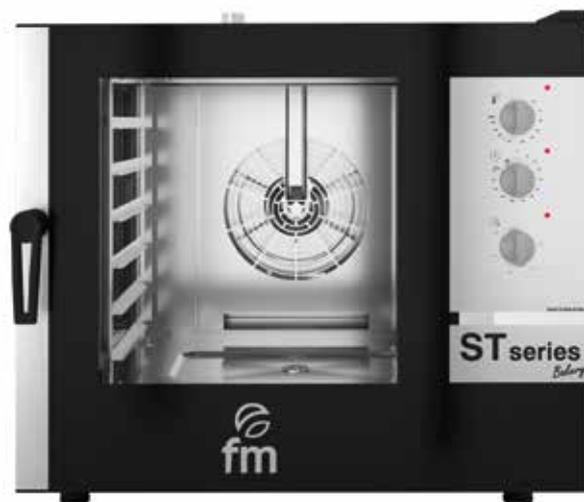

Transverse tray position




STB 606 V7 GAS

Reference	710494
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)985 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	135 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	14 KW - 12040 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners



Transverse tray position




ST BAKERY 610 SERIES

10x600x400

STB 610 M

Reference	710495
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)905 X (H)1155 mm.
 Electric power	15.600 W
 Maximum temperature	250°
 Weight	150 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
10 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


Transverse tray position



STB 610 V7

Reference	710496
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)945 X (H)1155 mm.
 Electric power	15.600 W
 Maximum temperature	270°
 Weight	155 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.

Transverse tray position



ST BAKERY 610 SERIES


10x600x400

STB 610 M GAS

Reference	710497
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)985 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	140 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
10 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners

Transverse tray position



STB 610 V7 GAS

Reference	710498
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)985 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	150 Kg.
 Voltage	230 V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners

Transverse tray position




ST BAKERY 616 SERIES

16x600x400

STB 616 ET

Reference	710499
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)930 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	250°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Trolley	Yes
16 Trays capacity	600 x 400
Distance between trays	80 mm.

Transverse tray position




ST BAKERY 616 SERIES

16x600x400

STB 616 V7 T

Reference	710500
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)930 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	270°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
16 Trays capacity	600 x 400
Distance between trays	80 mm.

Transverse tray position



STB 616 V7 T GAS

Reference	710501
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)1030 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	288 Kg.
 Voltage	230V-50/60Hz
Connection	Single phase
Gas power	28 kW - 24080 Kcal/h
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
16 Trays capacity	600 x 400
Distance between trays	80 mm.

 Premix gas burners

Transverse tray position



ST BAKERY 6/86 SERIES


6x800x600

STB 6/86 V7

Reference	710502
Internal dimensions	(An)710 x (F)900 X (Al)550 mm.
External dimensions	(An)880 x (F)1385 X (Al)835 mm.
 Electric power	14.650 W
 Maximum temperature	270°
 Weight	140 Kg.
 Voltage	400 V - 3L + N 50/60Hz
Connection	Trifásica 3F + N + T
Automatic washing	opcional
Removable core probe	opcional
Change door opening	
6 Trays capacity	800 x 600 / (12) 600X400
Distance between trays	80 mm.



Longitudinal tray position




STB 6/86 V7 GAS

Reference	710503
Internal dimensions	(W)710 x (D)900 X (H)550 mm.
External dimensions	(W)880 x (D)1385 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	155 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW- 17200 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	800 x 600 / (12) 600x400
Distance between trays	80 mm.



Longitudinal tray position



 Premix gas burners


ST BAKERY 10/86 SERIES

10x800x600

STB 10/86 V7

Reference	710504
Internal dimensions	(W)710 x (D)900 X (H)875 mm.
External dimensions	(W)880 x (D)1385 X (H)1155 mm.
 Electric power	29.300 W
 Maximum temperature	270°
 Weight	180 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	800x600 / (20) 600x400
Distance between trays	80 mm.

Longitudinal tray position




STB 10/86 V7 GAS

Reference	710505
Internal dimensions	(W)710 x (D)900 X (H)875 mm.
External dimensions	(W)880 x (D)1385 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	195 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	28 kW - 24080 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	800x600 / (20) 600x400
Distance between trays	80 mm.

 Premix gas burners

Longitudinal tray position



ST BAKERY 18/86 SERIES

18x800x600

STB 18/86 V7 T

Reference	710506
Internal dimensions	(W)710 x (D)920 X (H)1480 mm.
External dimensions	(W)880 x (D)1270 X (H)1865 mm.
 Electric power	40.000 W
 Maximum temperature	270°
 Weight	320 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
18 Trays capacity	800x600 / (36) 600x400
Distance between trays	80 mm.

Longitudinal tray position




STB 18/86 V7 GAS T

Reference	710507
Internal dimensions	(W)710 x (D)920 X (H)1480 mm.
External dimensions	(W)880 x (D)1420 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	360 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	38 kW - 32675 kcal/h
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
18 Trays capacity	800x600 / (36) 600x400
Distance between trays	80 mm.

 Premix gas burners

Longitudinal tray position



ACCESSORIES

STANDS		DIMENSIONS	COMPATIBLE MODELS		RRP PRICE
	STB 300 Ref. 710508	(W)810 x (D)760 x (H)300 mm.	STB 604 M STB 604 V7 STB 606 M STB 606 V7 STB 606 M GAS	STB 606 V7 GAS STB 610 M STB 610 V7 STB 610 M GAS STB 610 V7 GAS	
	STB 650 Ref. 710509 N. Guides - 6	(W)810 x (D)760 x (H)650 mm.	STB 604 M STB 604 V7 STB 606 M STB 606 V7 STB 606 M GAS	STB 606 V7 GAS STB 610 M STB 610 V7 STB 610 M GAS STB 610 V7 GAS	
	STB 850 Ref. 710510 N. Guides - 8	(W)810 x (D)760 x (H)850 mm.	STB 604 M STB 604 V7 STB 606 M STB 606 V7 STB 606 M GAS	STB 606 V7 GAS STB 610 M STB 610 V7 STB 610 M GAS STB 610 V7 GAS	
	STB 300 (800X600) Ref. 710511	(W)810 x (D)1160 x (H)300 mm.	STB 6/86 V STB 6/86 V7 GAS STB 10/86 V7 STB 10/86 V7 GAS		
	STB 650 (800X600) Ref. 710512 N. Guides - 6	(W)810 x (D)1160 x (H)650 mm.	STB 6/86 V STB 6/86 V7 GAS STB 10/86 V7 STB 10/86 V7 GAS		
	STB 850 (800X600) Ref. 710513 N. Guides - 8	(W)810 x (D)1160 x (H)850 mm.	STB 6/86 V STB 6/86 V7 GAS STB 10/86 V7 STB 10/86 V7 GAS		
	Ref. 710286		Wheeled option		


ACCESSORIES

MODULE		DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	Module STB Ref. 710580	Internal dimensions External dimensions Cooking surface Electric power Maximum temperature Weight Voltage Connection Humidifier (optional)	(W)670 x (D)525 x (H)180 mm. (W)800 x (D)905 x (H)385 mm. 670x525 mm 5,400 W 350 °C 100 Kg 400 / 230 V - 50/60 Hz. Three phase 3F + N + T Ref. 710602	


HOODS		DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 Includes: - Extraction motor - Fumes condenser	STB M Ref. 710514	(W)880 x (D)1105 x (H)315 mm.	STB 604 M STB 606 M STB 610 M	
	STB V7 Ref. 710515	(W)880 x (D)1105 x (H)315 mm.	STB 604 V7 STB 606 V7 STB 610 V7 STB 616 V7	
	STB 80x60 Ref. 710516	(W)880 x (D)1505 x (H)315 mm.	STB 686 V7 STB 1086 V7	Fumes outlet connection ø 120 mm.

FUMES CONDENSER KIT		DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STB Fumes condenser Ref. 710517	(W)510 x (D)210 x(H)315 mm.	STB 604 M STB 606 M STB 610 M	
	STB V7 Fumes condenser Ref. 710518	(W)510 x (D)210 x(H)315 mm.	STB 604 V7 STB 686 V7 STB 606 V7 STB 1086 V7 STB 610 V7	

FIRST INSTALLATION KIT		CONTAINS	RRP PRICE
	Ref. 710434	The first installation kit contains: Pipes, connections, adapters and the required accessories for the oven installation. 1 Kg of FM detergent and rinse	

SUPERPOSITION KIT		DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	STB Ref. 710519		STB 604 M STB 610 M STB 604 V7 STB 610 V7 STB 606 M STB 606 V7	
	STB MODULE Ref. 710632	(W)880 x (D)935 x (H)80 mm.		"See page 61"

ST BAKERY MODULE

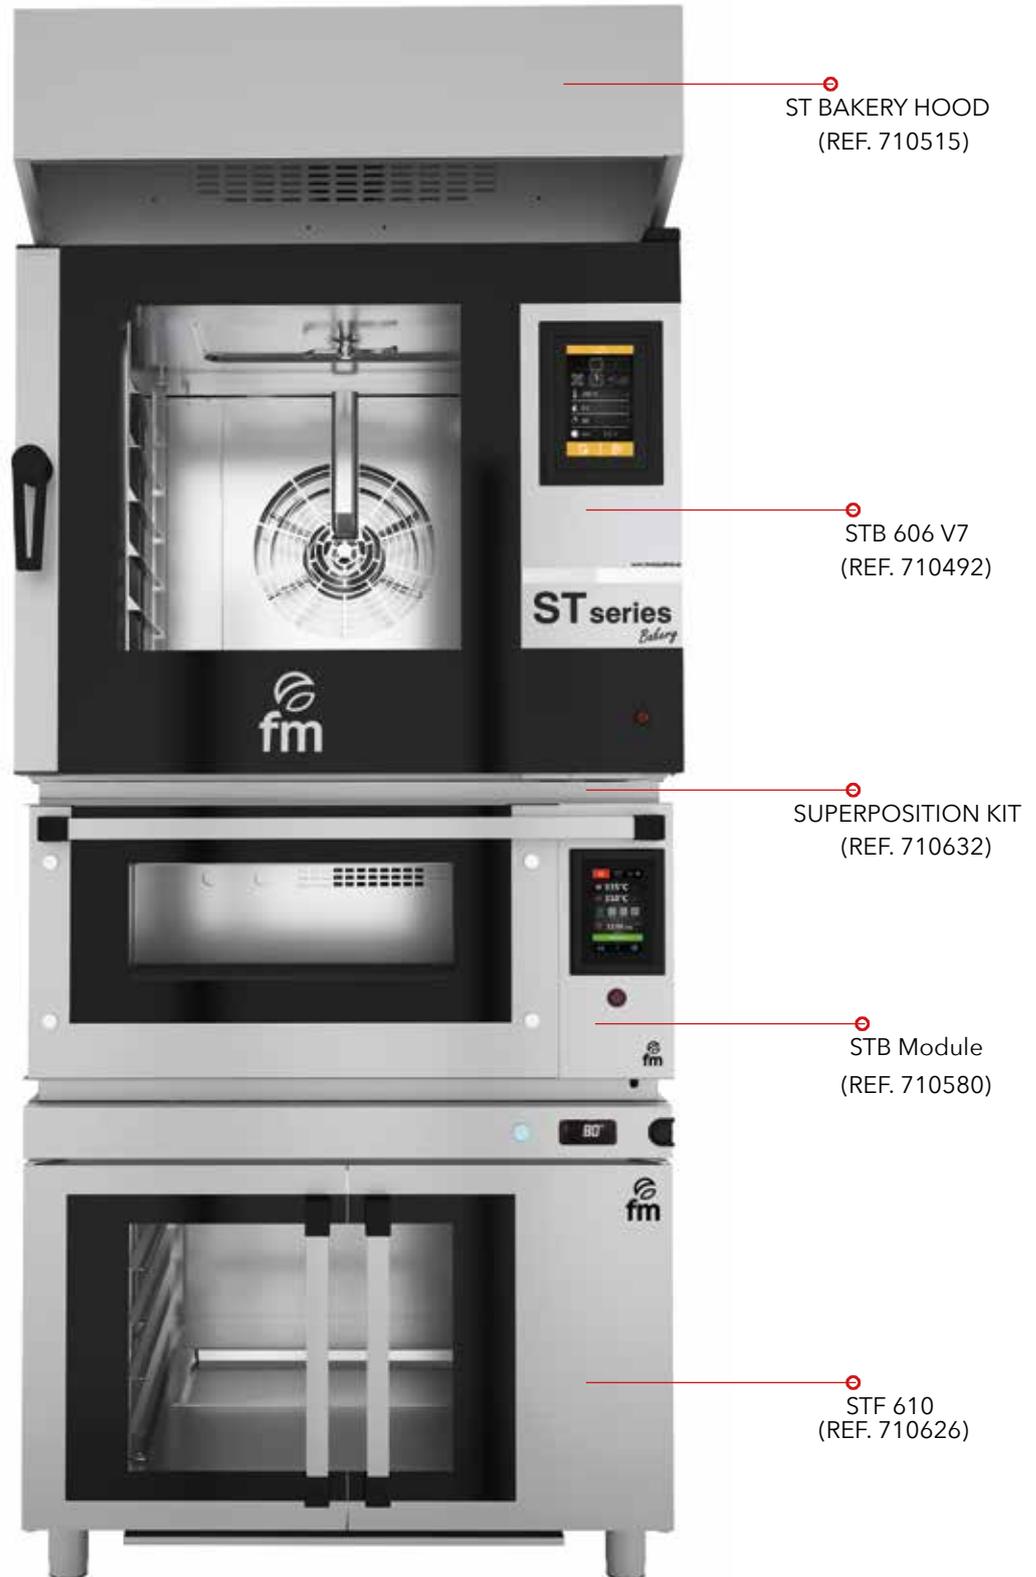



RX

RX SERIES

RX 203

Reference	710520
Internal dimensions	(W)360 x (D)290 x (H)260 mm.
External dimensions	(W)500 x (D)560 x (H)455 mm.
 Electric power	2.250 W
 Maximum temperature	250° C
 Weight	22 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	3x340x240 - 3xGN 1/2
Distance between trays	80 mm
Standard equipment	3 perforated aluminium trays
Humidifier Ref. 710521	
Safety thermostat - 0-60 Minute timer. Non-stop mode	



RX 304

Reference	710522
Internal dimensions	(W)450 x (D)340 x (H)345 mm.
External dimensions	(W)590 x (D)675 x (H)540 mm.
 Electric power	3.100 W
 Maximum temperature	250° C
 Weight	35 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x430x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 perforated aluminium trays
Humidifier Ref. 710523	
Safety thermostat - 0-60 Minute timer. Non-stop mode	



RX 424

Reference	710524
Internal dimensions	(W)500 x (D)410 x (H)350 mm.
External dimensions	(W)640 x (D)720 x (H)545 mm.
 Electric power	3.100 W
 Maximum temperature	250° C
 Weight	40 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x480x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 wire rack
Humidifier Ref. 710525	
End of cycle alarm - Safety thermostat - Chamber light 0-60 Minute timer. Non-stop mode	



RX SERIES

RX 603

Reference	710527
Internal dimensions	(W)680 x (D)470 x (H)285 mm.
External dimensions	(W)820 x (D)800 x (H)480 mm.
 Electric power	3.900 W
 Maximum temperature	250° C
 Weight	45 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity	3x600x400 / 3 GN 1/1
Distance between trays	80 mm
Standard equipment	3 wire rack
Humidifier Ref. 710528	
End of cycle alarm - Door switch - Safety thermostat	
Rotation inverter - Chamber light - 0-60 Minute timer. Non-stop mode	



RX 604

Reference	710529
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	5.700 W
 Maximum temperature	250° C
 Weight	52 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Humidifier Ref. 710530	
Single phase modification option (230 V)	
End of cycle alarm - Door switch - Safety thermostat	
Rotation inverter - Chamber light - 0-60 Minute timer. Non-stop mode	



RX 604 Plus

Reference	710531
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	6.300 W
 Maximum temperature	250° C
 Weight	55 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Humidifier Ref. 710532	
Single phase modification option (230 V)	
End of cycle alarm - Door switch - Safety thermostat	
Rotation inverter - Chamber light - 0-60 Minute timer. Non-stop mode	



RX SERIES

RXL 304

Reference	710534
Internal dimensions	(W)450 x (D)340 x (H)345 mm.
External dimensions	(W)590 x (D)675 x (H)540 mm.
 Electric power	3.100 W
 Maximum temperature	250° C
 Weight	35 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x430x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 perforated aluminium trays
Humidifier Ref. 710535	
Change door opening	
Safety thermostat - 0-60 Minute timer. Non-stop mode.	



RXL 424

Reference	710536
Internal dimensions	(W)500 x (D)410 x (H)350 mm.
External dimensions	(W)640 x (D)720 x (H)545 mm.
 Electric power	3.100 W
 Maximum temperature	250° C
 Weight	40 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x480x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 wire rack
Humifier Ref. 710537	
Change door opening	
End of cycle alarm - Safety thermostat - Chamber light 0-60 Minute timer. Non-stop mode	



RXL 603

Reference	710538
Internal dimensions	(W)680 x (D)470 x (H)285 mm.
External dimensions	(W)820 x (D)800 x (H)480 mm.
 Electric power	3.900 W
 Maximum temperature	250° C
 Weight	45 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity	3x600x400 / 3 GN 1/1
Distance between trays	80 mm
Standard equipment	3 wire rack
Humidifier Ref. 710539	
Change door opening	
End of cycle alarm - Door switch - Safety thermostat	
Rotation inverter - Chamber light	
0-60 Minute timer. Non-stop mode	



RXL 604 Plus

Reference	710540
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	6.300 W
 Maximum temperature	250° C
 Weight	55 Kg.
 Voltage	400 - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Humidifier Ref. 710530	
Single phase modification option (230 V)	
Change door opening	
End of cycle alarm - Door switch - Safety thermostat	
Rotation inverter - Chamber light	
0-60 Minute timer. Non-stop mode	



RX SERIES

RXD 384

Reference	710542
Internal dimensions	(W)450 x (D)370 x (H)345 mm.
External dimensions	(W)590 x (D)700 x (H)540 mm.
 Electric power	3.200 W
 Maximum temperature	260° C
 Weight	40 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x430x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 wire rack
Cooking phases - Recipe book - Door switch - Automatic preheating 3/4" Water connection - Safety thermostat - Chamber light Rotation inverter	



RXD 604 Plus

Reference	710543
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	6.300 W
 Maximum temperature	260° C
 Weight	55 Kg.
 Voltage	400 - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Single phase modification option (230 V)	
End of cycle alarm - 0 to 100% humidity regulation	
Cooking phases - Recipe book - Door switch	
Automatic preheating - 3/4" Water connection - Safety thermostat	
Rotation inverter - Chamber light	



RXDL 384

Reference	710544
Internal dimensions	(W)450 x (D)370 x (H)345 mm.
External dimensions	(W)590 x (D)700 x (H)540 mm.
 Electric power	3.100 W
 Maximum temperature	260° C
 Weight	40 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x430x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 wire rack
Change door opening	
End of cycle alarm - 0 to 100 % humidity regulation	
Cooking phases - Recipe book - Door switch	
Automatic preheating - 3/4" Water connection - Safety thermostat	
Chamber light - Rotation inverter	



RXDL 604 Plus

Reference	710545
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	6.300 W
 Maximum temperature	260° C
 Weight	55 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Single phase modification option (230 V)	
Change door opening	
End of cycle alarm - 0 to 100% humidity regulation	
Cooking phases - Recipe book - Door switch	
Automatic preheating - 3/4" Water connection	
Safety thermostat - Rotation inverter - Chamber light	



RX SERIES

RX 424 HG

Reference	710526
Internal dimensions	(W)500 x (D)410 x (H)350 mm.
External dimensions	(W)640 x (D)720 x (H)545 mm.
 Electric power	3.100 W
 Maximum temperature	250° C
 Weight	41 Kg.
 Voltage	230 V - 50 Hz
Connection	Single phase Schuko
Capacity	4x480x340 / 4 GN 2/3
Distance between trays	80 mm
Standard equipment	4 wire rack
Humidifier - Grill - End of cycle alarm - Safety thermostat Chamber light - 0-60 Minute timer. Non-stop mode	



RX 604 Plus HG

Reference	710533
Internal dimensions	(W)680 x (D)470 x (H)365 mm.
External dimensions	(W)820 x (D)800 x (H)560 mm.
 Electric power	6.300 W
 Maximum temperature	250° C
 Weight	56 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
Single phase modification option (230 V)	
Humidifier - Grill - End of cycle alarm - Door switch Safety thermostat - Rotation inverter Chamber light - 0-60 Minute timer. Non-stop mode	



RX SERIES

RXP 604

Reference	710546
Internal dimensions	(W)620 x (D)450 x (H)350 mm.
External dimensions	(W)760 x (D)760 x (H)545 mm.
 Electric power	3.800 W
 Maximum temperature	250° C
 Weight	52 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase
Capacity	4x600x400 / 4 GN 1/1
Distance between trays	80 mm
Standard equipment	4 wire rack
End of cycle alarm - Door switch - Safety thermostat Chamber light - 0-60 Minute timer. Non-stop mode	



ACCESSORIES

HOODS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>RX 60/40 Ref. 710631</p> <p>Includes: - Extraction motor - Fumes condenser</p>	(W)820 x (D)850 x (H)235 mm	RX 603 RXL 603 RX 604 RX 604 PLUS	RXL 604 PLUS RXD 604 PLUS RXDL 604 PLUS RX 604 PLUS HG
Fumes outlet connection ø 120 mm.			

STANDS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>RX 43/34 Ref. 710547 N. guides - 8</p>	(W)590 x (D)580 x (H)850 mm	RX 304 RXL 304 Compatible with GN 2/3 trays	
 <p>RX 48/34 Ref. 710548 N. guides - 8</p>	(W)625 x (D)640 x (H)850 mm	RX 424 RXL 424 RX 424 HG Compatible with GN 2/3 trays	RXD 424 RXDL 424
 <p>RX 60/40 Ref. 710549 N. guides - 8</p>	(W)810 x (D)700 x (H)850 mm	RX 603 RXL 603 RX 604 RX 604 PLUS Compatible with GN 1/1 trays	RXL 604 PLUS RXD 604 PLUS RXDL 604 PLUS
	Ref. 710286	Wheeled option	

FUMES CONDENSER KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>SERIE RX Ref. 710551</p>	(W)170 x (D)60 x (H)400 mm	SERIE RX	
<p>SERIE RX H20 Ref. 710552</p>	(W)720 x (D)85 x (H)450 mm	SERIE RX	
<p>SERIE RX DUO Ref. 710553</p>	(W)580 x (D)120 x (H)180 mm.	SERIE RX	

SUPERPOSITION KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>RX 43/34 Ref. 710554</p>	(W)590 x (D)675 x (H)40 mm.	RX 304 RXL 304	
<p>RX 48/34 Ref. 710555</p>	(W)640 x (D)720 x (H)40 mm.	RX 424 RXL 424 RX 424 HG	RXD 424 RXDL 424
<p>RX 60/40 Ref. 710556</p>	(W)820 x (D)800 x (H)40 mm.	RX 603 RXL 603 RX 604	RX 604 PLUS RXL 604 PLUS RXD 604 PLUS RXDL 604 PLUS

ST *Pizza / Pastry*

ST PASTRY SERIES


600x400

STP 642

Reference	710587
Internal dimensions	(W)820 x (D)700 x (H)170 mm
External dimensions	(W)1090 x (D)990 x (H)380 mm
 Electric power	5.600 W
 Maximum temperature	350 °C
 Weight	110 kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Cooking surface	820x700 mm
Humidifier (optional)	Ref. 710602
Single phase modification option (230 V)	
3/4" Water connection	
2 Trays capacity	600x400
5" Touch screen - Cooking surface high-quality refractory material	
Independent base/top temperature control - Led chamber light	



Longitudinal tray position




STP 643


Reference	710588
Internal dimensions	(W)1230 x (D)700 x (H)170 mm
External dimensions	(W)1500 x (D)990 x (H)380 mm
 Electric power	8.800 W
 Maximum temperature	350 °C
 Weight	140 Kg.
 Voltage	400 V - 3 L + N 50/60 Hz
Connection	Three phase 3F + N + T
Cooking surface	1230x700 mm
Humidifier (optional)	Ref. 710602
3/4" Water connection	
3 Trays capacity	600x400
5" Touch screen - Cooking surface high-quality refractory material	
Independent base/top temperature control - Led chamber light	



Longitudinal tray position




Up to 4 levels

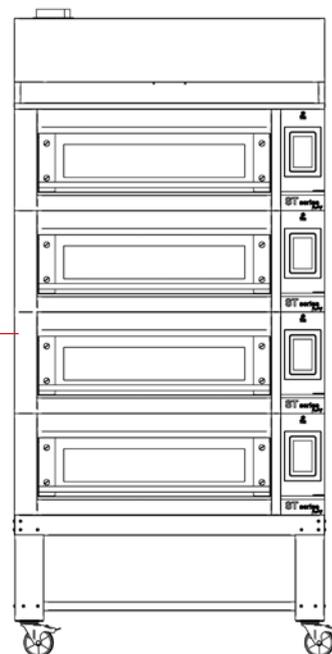

ST PIZZA SERIES


STZ 433

Reference	710591
Internal dimensions	(W)820 x (D)700 x (H)170 mm
External dimensions	(W)1090 x (D)990 x (H)380 mm
 Electric power	5.600 W
 Maximum temperature	400° C
 Weight	110 Kg.
 Voltage	400 V - 50/60 Hz.
Connection	Three phase 3F + N + T / Single phase
Single phase modification option (230 V)	
Cooking surface	820x700 mm.
Capacity	4 x ø330 mm.
Cooking surface high-quality refractory material - Thermometer Independent base/top temperature control - Led chamber light	




STZ 633

Reference	710592
Internal dimensions	(W)1230 x (D)700 x (H)170 mm
External dimensions	(W)1500 x (D)990 x (H)380 mm
 Electric power	8.800 W
 Maximum temperature	400° C
 Weight	140 Kg.
 Voltage	400 V - 50/60 Hz.
Connection	Three phase 3F + N + T
Cooking surface	1230x700 mm.
Capacity	6 x ø330 mm.
Cooking surface high-quality refractory material - Thermometer Independent base/top temperature control - Led chamber light	



Up to 4 levels

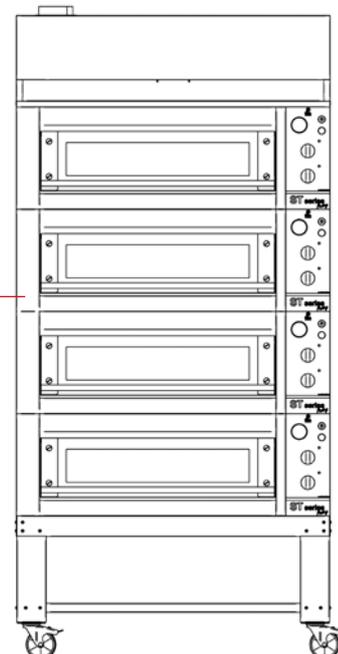

ST PIZZA SERIES

STZ 133

Reference	710589
Internal dimensions	(W)405 x (D)360 x (H)80mm
External dimensions	(W)535 x (D)535 x (H)261mm
 Electric power	2.000 W
 Maximum temperature	320° C
 Weight	20 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity	ø350 mm

High-quality refractory material cooking surface
Cycle end alarm - Timer 0-60 min. Non-stop mode



STZ 233

Reference	710590
Internal dimensions	2 x (W)405 x (D)360 x (H)80mm
External dimensions	(W)535 x (D)535 x (H)390mm
 Electric power	3.000 W
 Maximum temperature	320° C
 Weight	28 Kg.
 Voltage	230V - 50/60 Hz.
Connection	Single phase Schuko
Capacity	2 x ø350 mm

High-quality refractory material cooking surface
Cycle end alarm - Timer 0-60 min. Non-stop mode



ACCESSORIES

STANDS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	SP-642 H1000 (1 or 2 modules) Ref. 710593	(W)1090 x (D)940 x (H)1000 mm.	STP-642 STZ-433
	SP-642 H650 (3 modules) Ref. 710594	(W)1090 x (D)940 x (H)650 mm.	STP-642 STZ-433
	SP-642 H350 (4 modules) Ref. 710595	(W)1090 x (D)940 x (H)350 mm.	STP-642 STZ-433
	SP-643 H1000 (1 or 2 modules) Ref. 710596	(W)1500 x (D)940 x (H)1000 mm.	STP-643 STZ-633
	SP-643 H650 (3 modules) Ref. 710597	(W)1500 x (D)940 x (H)650 mm.	STP-643 STZ-633
	SP-643 H350 (4 modules) Ref. 710598	(W)1500 x (D)940 x (H)350 mm.	STP-643 STZ-633

HOODS	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
 <p>Includes: - Extraction motor - Fumes condenser</p>	SP-642 Ref. 710599	(W) 1090 x (D) 1300 x (H) 300 mm.	
	SP-643 Ref. 710600	(W) 1500 x (D) 1300 x (H) 300 mm.	
		Fumes outlet connection ø 120 mm.	

FUMES CONDENSER KIT	DIMENSIONS	COMPATIBLE MODELS	RRP PRICE
	SP Ref. 710601	STP-642 STP-643 STZ-433 STZ-633	

ANALOG PROVERS

F 408

Reference	710603
Internal dimensions	(W)520 x (D)560 x (H)650 mm.
External dimensions	(W)640 x (D)640 x (H)930 mm.
 Electric power	700 W
 Maximum temperature	85° C
 Weight	35 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 8 trays	480x340
Distance between trays	80 mm.



F 608

Reference	710604
Internal dimensions	(W)640 x (D)625 x (H)650 mm.
External dimensions	(W)760 x (D)700 x (H)930 mm.
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	42 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 8 trays	600x400
Distance between trays	80 mm.



DIGITAL PROVERS

STF 610

Reference	710626
Internal dimensions	(W)690 x (D)850 x (H)425 mm.
External dimensions	(W)880 x (D)935 x (H)690 mm.
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	60 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 10/5 trays	600x400 / 600x800
Distance between trays	80 mm.
3/4" Water connection	
Water tank fill up button	
Compatible with ST Bakery dimensions	



STF 620

Reference	710606
Internal dimensions	(W)690 x (D)850 x (H)825 mm.
External dimensions	(W)880 x (D)935 x (H)1090 mm.
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	80 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 20/10 trays	600x400 / 600x800
Distance between trays	80 mm.
3/4" Water connection	
Water tank fill up button	
Compatible with ST Bakery dimensions	



ANALOG REGENERATORS

RG 311 A

Reference	710610
Internal dimensions	(W)594 x (D)386 x (H)255 mm.
External dimensions	(W)735 x (D)710 x (H)450 mm.
 Electric power	3.900 W
 Maximum temperature	140° C / 160° C
 Weight	39 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 3 trays	GN 1/1
Distance between trays	65 mm.

Change door opening

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat



RG 611 A

Reference	710611
Internal dimensions	(W)594 x (D)386 x (H)451 mm.
External dimensions	(W)735 x (D)710 x (H)720 mm.
 Electric power	5.650 W
 Maximum temperature	140° C / 160° C
 Weight	52 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Single phase modification	
Capacity 6 trays	GN 1/1
Distance between trays	65 mm.

Change door opening

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat



RG 1011 A

Reference	710612
Internal dimensions	(W)594 x (D)386 x (H)710 mm.
External dimensions	(W)735 x (D)710 x (H)985 mm.
 Electric power	10.300 W
 Maximum temperature	140° C / 160° C
 Weight	85 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Capacity 10 trays	GN 1/1
Distance between trays	65 mm.

Change door opening

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat



ACCESSORIES:

RG Stand - 8 guides (Ref. 710630)

Wheeled option (Ref. 710286)

DIGITAL REGENERATORS

RG 311

Reference	710607
Internal dimensions	(W)594 x (D)386 x (H)255 mm.
External dimensions	(W)735 x (D)710 x (H)450 mm.
 Electric power	3.900 W
 Maximum temperature	170° C
 Weight	39 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 3 trays	GN 1/1
Distance between trays	65 mm.
Humidity	0% - 100%
Water connection	Yes
Pre heating	Yes
Cooking programs	99 (with 3 phases each)
Change door opening	

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat

RG 611

Reference	710608
Internal dimensions	(W)594 x (D)386 x (H)451 mm.
External dimensions	(W)735 x (D)710 x (H)720 mm.
 Electric power	5.650 W
 Maximum temperature	170° C
 Weight	52 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Single phase modification	
Capacity 6 trays	GN 1/1
Distance between trays	65 mm.
Humidity	0% - 100%
Water connection	Yes
Pre heating	Yes
Cooking programs	99 (with 3 phases each)
Change door opening	

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat

RG 1011

Reference	710609
Internal dimensions	(W)594 x (D)386 x (H)710 mm.
External dimensions	(W)735 x (D)710 x (H)985 mm.
 Electric power	10.300 W
 Maximum temperature	170° C
 Weight	85 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3 F + N + T
Capacity 10 trays	GN 1/1
Distance between trays	65 mm.
Humidity	0% - 100%
Water connection	Yes
Pre heating	Yes
Cooking programs	99 (with 3 phases each)
Change door opening	

End of cycle alarm - Reversing gear - Door safety switch - Safety thermostat



GRILL

GR 1

Reference	710613
External dimensions	(W)330 x (D)430 x (H)260 mm.
 Electric power	2.000 W
 Maximum temperature	250° C
 Weight	21 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Cast iron cooking surface	255x245 mm.

GRL-1 (Smooth base cooking surface)

Reference	710621
Cast iron cooking surface - Front grease collector	
Grooved base and top surface - Adjustable height up the needs	
Hinged cover brake	




GR 2

Reference	710614
External dimensions	(W)650 x (D)430 x (H)260 mm.
 Electric power	4.000 W
 Maximum temperature	250° C
 Weight	40 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Cast iron cooking surface	550x245

GRL-2 (Smooth base cooking surface)

Reference	710622
Cast iron cooking surface - Front grease collector	
Grooved base and top surface - Adjustable height up the needs	
Hinged cover brake	

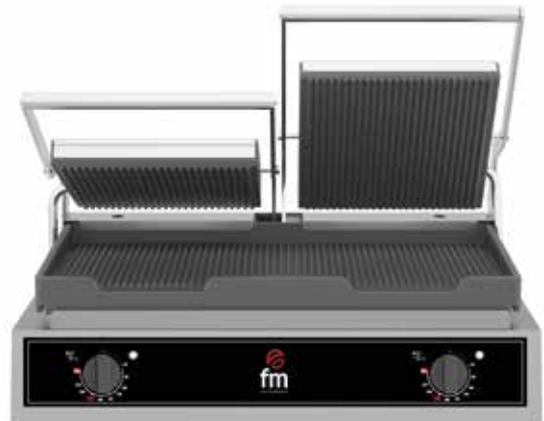

GR 3

Reference	710615
External dimensions	(W)440 x (D)430 x (H)260 mm.
 Electric power	3.300 W
 Maximum temperature	250° C
 Weight	30 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Cast iron cooking surface	360x245

GRL-3 (Smooth base cooking surface)

Reference	710623
Cast iron cooking surface - Front grease collector	
Grooved base and top surface - Adjustable height up the needs	
Hinged cover brake	



TTH 3002

Reference	710616
Cooking chamber dimensions	(W)200 x (D)500 x (H)70 mm.
External dimensions	(W)750 x (D)420 x (H)250 mm.
 Electric power	3.000 W
 Weight	20 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko

Adjustable speed - Independent heating elements regulation
Removable bottom tray - Double turning direction



TTH 4400

Reference	710617
Cooking chamber dimensions	(W)335 x (D)555 x (H)70 mm.
External dimensions	(W)1258 x (D)575 x (H)335 mm.
 Electric power	4.400 W
 Weight	35 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko

Three phase

Adjustable speed - Removable bottom tray
Adjustable entry height (Min. 30/ Max. 70)
Double turning direction - Upper plate warmer tray



TTV 2400

Reference	710618
Cooking chamber dimensions	(W)260 x (D)460 x (H)70 mm.
External dimensions	(W)480 x (D)510 x (H)410 mm.
 Electric power	2.800 W
 Weight	20 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko

Adjustable speed - Independent heating elements regulation
Removable bottom tray



TTV 4000

Reference	710619
Cooking chamber dimensions	(W)360 x (D)570 x (H)70 mm.
External dimensions	(W)570 x (D)620 x (H)400 mm.
 Electric power	4.000 W
 Weight	22 Kg.
 Voltage	400/230 V - 50/60 Hz
Connection	Single phase Schuko

Three phase

Adjustable speed - Independent heating elements regulation
Removable bottom tray



GN TRAYS



NON-STICK ALUMINIUM FLAT TRAY

REF.	DIMENSIONS
810H11	600x400
810H14	GN 1/1
810H17	GN 2/3
810H19	800x600




NON-STICK ALUMINIUM PERFORATED TRAY

REF.	DIMENSIONS
810H12	600x400
810H15	GN 1/1
810H18	GN 2/3
810H20	800x600



NON-STICK GRILL FLAT TRAY GN 1/1

REF.	DIMENSIONS
840H03	GN 1/1

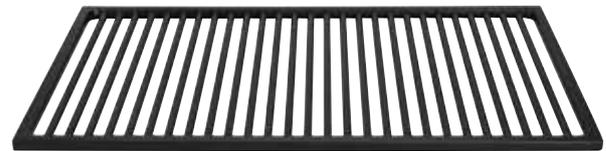

NON-STICK GRILL GN 1/1

REF.	DIMENSIONS
840H37	GN 1/1




EGG TRAY GN

REF.	DIMENSIONS
840H28	GN 1/1



NON-STICK ALUMINIUM TRAY GN 1/1 D 65 mm.

REF.	DIMENSIONS
840H29	GN 1/1

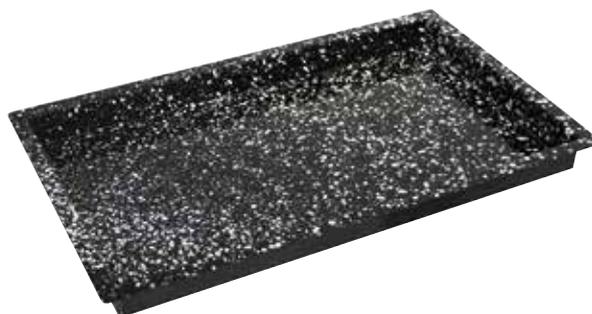


GRANITE CONTAINER GN 1/1 DEPTH 40 mm.

REF.	DIMENSIONS
840H36	GN 1/1




BAKING AND ROASTING PAN

REF.	DIMENSIONS
840H32	20 cm.

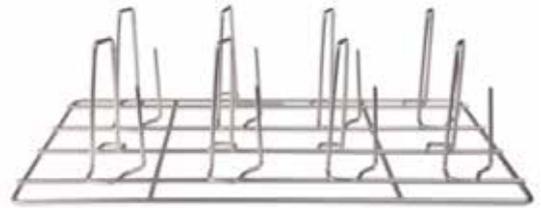

CHICKEN ROASTING TRAY

REF.	DIMENSIONS
840H39	GN 1/1

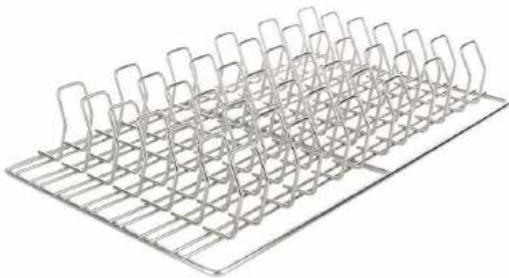

RIBS TRAY

REF.	DIMENSIONS
840H40	GN 1/1



FRYING TRAY

REF.	DIMENSIONS
840H34	GN 1/1



STAINLESS STEEL CONTAINER GN 2/1

REF.	DIMENSIONS
840H04	H20
840H05	H40
840H06	H65



STAINLESS STEEL CONTAINER GN 1/1

REF.	DIMENSIONS
840H07	H20
840H08	H40
840H09	H55



STAINLESS STEEL CONTAINER GN 2/3

REF.	DIMENSIONS
840H10	H20
840H11	H40
840H12	H65



PERFORATED STAINLESS STEEL CONTAINER GN 2/1

REF.	DIMENSIONS
840H13	H20
840H14	H40
840H15	H65

GN TRAYS



PERFORATED STAINLESS STEEL CONTAINER GN 1/1

REF.	DIMENSIONS
840H16	H20
840H17	H40
840H18	H55



PERFORATED STAINLESS STEEL CONTAINER GN 2/3

REF.	DIMENSIONS
840H19	H20
840H20	H40
840H21	H65



PERFORATED BOTTOM TRAY GN

REF.	DIMENSIONS
840H22	GN 2/1
840H23	GN1/1
840H24	GN 2/3



INOX WIRE RACK

REF.	DIMENSIONS
840H25	GN 2/1
840H26	GN 1/1
840H41	600x400



ALUMINIUM PIZZA PAN

REF.	DIMENSIONS
811H01	250 mm.
811H02	300 mm.
811H03	350 mm.



PIZZA PAN GRID

REF.	DIMENSIONS
811H04	250 mm.
811H05	300 mm.
811H06	350 mm.

PASTRY/BAKERY TRAYS



PERFORATED ALUMINIUM TRAY

REF.	DIMENSIONS
810H09	340x240
810H01	430x340
810H02	480x340
810H08	480x440
810H03	600x400
810H22	800x600



WIRE RACK

REF.	DIMENSIONS
820H03	430x340
820H01	480x340
820H04	480x440
820H02	600x400



ALUMINIUM FLAT TRAY

REF.	DIMENSIONS
810H10	430x340
810H06	480x340
810H04	600x400
810H21	800x600



INOX FLAT TRAY

REF.	DIMENSIONS
860H12	340x240
860H07	430x340
860H08	480x340
860H10	480x440
860H09	600x400



FRENCH BAGUETTE TRAY

REF.	DIMENSIONS
810H05	600x400
810H23	800x600

TROLLEYS

TROLLEYS

DIMENSIONS

COMPATIBLE MODELS

NUM. GUIDES

RRP PRICE

TROLLEY 10 600/400

Ref. 710097

(W)515 x (D)620 x (H)1015 mm.

RX 603/604/604 PLUS
ST BAKERY
ST PASTRY

10

TROLLEY 10 480/340

Ref. 710099

(W)455 x (D)500 x (H)1015 mm.

RX424

10

TROLLEY 20 480/340

Ref. 710098

(W)455 x (D)500 x (H)1860 mm.

RX424

20

TROLLEY 20 600/400

Ref. 710095

(W)515 x (D)620 x (H)1860 mm.

RX 603/604/604 PLUS
ST BAKERY
ST PASTRY

20

TROLLEY 20 800/600

Ref. 710624

(W)710 x (D)820 x (H)1860 mm.

ST BAKERY

20

TROLLEY 20 GN 1/1

Ref. 710403

(W)440 x (D)540 x (H)1700 mm.

ST COMPACT
ST GASTRO

20

TROLLEY 20 GN 2/1

Ref. 710408

(W)640 x (D)660 x (H)1700 mm.

ST COMPACT
ST GASTRO

20

TROLLEY ST16 600/400

Ref. 710346

(W)760 x (D)595 x (H)1730 mm.

ST BAKERY

16

TROLLEY ST18 800/600

Ref. 710625

(W)760 x (D)895 x (H)1730 mm.

ST BAKERY

18

TROLLEY ST20 GN 1/1

Ref. 710347

(W)760 x (D)595 x (H)1765 mm.

ST COMPACT
ST GASTRO

20

TROLLEY ST20 GN 2/1

Ref. 710348

(W)760 x (D)765 x (H)1765 mm.

ST COMPACT
ST GASTRO

20

PLATES TROLLEY 64 GN 1/1

Ref. 710429

(W)760 x (D)595 x (H)1765 mm.

ST COMPACT
ST GASTRO

64 PLATES



PLATES TROLLEY 100 GN 2/1

Ref. 710430

(W)760 x (D)765 x (H)1765 mm.

ST COMPACT
ST GASTRO

100 PLATES

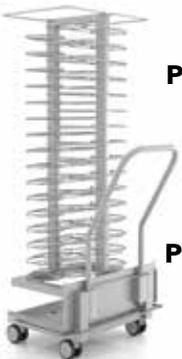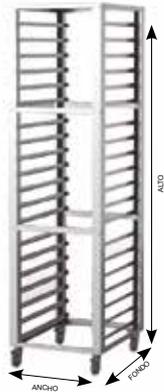

COMMON ACCESSORIES



AUTOMATIC WASHING

REF.

710141

ST 200 710356



DETERGENT

REF.

5 Kg.: 870H02

10 Kg.: 870H08



RINSE

REF.

5 Kg.: 870H03

10 Kg.: 870H09



EXTERNAL SHOWER

REF.

710310



DIGIMETER

REF.

710090



WATER FILTER (8000 L)

REF.

710352



WATER FILTER CONNECTION

REF.

710350



CORE PROBE

REF.

VACUUM 710376

MULTIPOINT 710620

REMOVABLE 710375



BAKER MITTS

REF.


870H01



GAS INSTALLATION KIT

REF.

710442

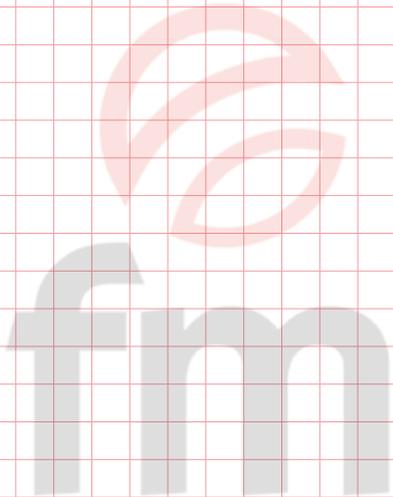





14900 LUCENA (Córdoba)
Mailbox 98
SPAIN

tel. (0034) 957 501 101 / fax. (0034) 957 590 128
e-mail: fmindustrial@fmindustrial.es

www.fmindustrial.es